


FMB Macbeth 400

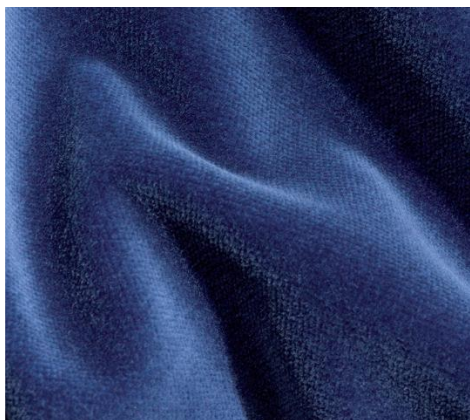

Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate
FMB	rola	140 cm	± 30 m	100 % bumbac	400 g/m ²

Reactie la foc 	FR- IGNIFUGAT Tratatamentul ignifug este solubil in apa. Materialul NU se spala cu apa si trebuie folosit si pastrat in spatii curate, uscate, aerisite, ferite de caldura, soare si vreme nefavorabila
--------------------	--

Certificat de ignifugare 	EN 13501-1 clasa B s1 do NFP 92-503 class M1 EN 13773:2003 clasa 1
------------------------------	--

Grad de opacitate	●●●●○ ●●●●● -cu captuseala
Grad de absorbtie a luminii	●●●●●
Rezistenta la frecare	●●○○○ ->30.000 c Martindale
Pentru pictura	●●●●○
Pentru print digital	●●○○○
Absorbția sunetului <ul style="list-style-type: none"> Montaj Tip G-150 (150 mm fata de peretele reflexiv) 100% falduri 	●●●●○ Conform ISO 11654 Coeficient masurat de absorbtie a sunetului: $\alpha_w = 0.52$ (H) Clasa de absorbtie a sunetului: D Conform ASTM C423 Coeficient de reducere a zgomotului: NRC = 0.46
Bariera fonica	●●○○○ Conform ISO 16283 Conform ASTM E413

Disponibilitate	la metru la rola confectionate la cerere
Culori personalizate	Disponibile la cerere Cantitate minima ± 300 ml
Mod de curatare	