


## FMV Macbeth Vox

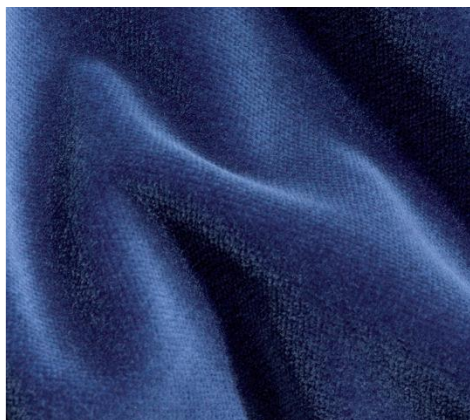

Cod 	Format 	Latime 	Lungime 	Compozitie 	Greutate 
FMV	rola	140 cm	± 30 m	100 % bumbac, verso acril	460 g/m <sup>2</sup>

Reactie la foc 	FR- IGNIFUGAT Tratatamentul ignifug este solubil in apa. Materialul NU se spala cu apa si trebuie folosit si pastrat in spatii curate, uscate, aerisite, ferite de caldura, soare si vreme nefavorabila
--------------------	--

Certificat de ignifugare 	EN 13501-1 clasa B s2 do
------------------------------	--------------------------

Grad de opacitate	● ● ● ● ●
Grad de absorbtie a luminii	● ● ● ● ●
Rezistenta la frecare	● ● ● ● ● — >30.000 c Martindale
Pentru pictura	● ● ● ● ● ○
Pentru print digital	● ● ● ● ● ○
Absorbtia sunetului	● ● ● ● ● ○
Bariera fonica	● ● ● ● ● ○

Disponibilitate	la metru la rola confectionate la cerere
-----------------	--

Culori personalizate	Disponibile la cerere Cantitate minima ± 700 ml
----------------------	--

